


3.x - NDW_HTTP_FRAMEWORK_SETUP

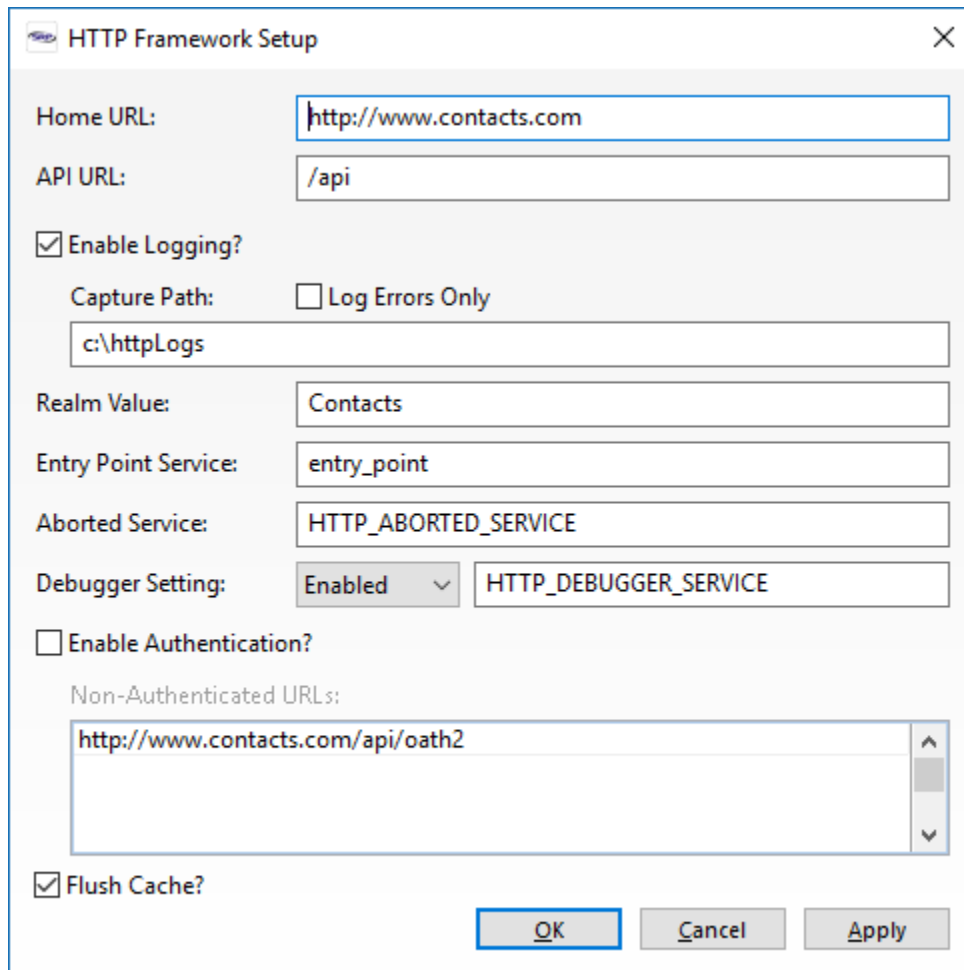

The screenshot shows a Windows-style dialog box titled "HTTP Framework Setup". It contains several configuration fields and checkboxes. The "Home URL" field is set to "http://www.contacts.com". The "API URL" field is set to "/api". The "Enable Logging?" checkbox is checked, and the "Capture Path" is set to "c:\\httpLogs". The "Log Errors Only" checkbox is unchecked. The "Realm Value" is set to "Contacts". The "Entry Point Service" is set to "entry_point". The "Aborted Service" is set to "HTTP_ABORTED_SERVICE". The "Debugger Setting" is set to "Enabled" with a dropdown arrow, and the "HTTP_DEBUGGER_SERVICE" is set to "HTTP_DEBUGGER_SERVICE". The "Enable Authentication?" checkbox is unchecked. The "Non-Authenticated URLs:" field is set to "http://www.contacts.com/api/oath2". The "Flush Cache?" checkbox is checked. At the bottom, there are three buttons: "OK", "Cancel", and "Apply".

HTTP Framework Setup

Home URL:

API URL:

☒ Enable Logging?

Capture Path: ☐ Log Errors Only

Realm Value:

Entry Point Service:

Aborted Service:

Debugger Setting:

☐ Enable Authentication?

Non-Authenticated URLs:

☒ Flush Cache?