

ItemFont

An item's font.

Usage

```
Set_Property(OLECtrlEntID, "OLE.ItemFont[key]", FontArray)
```

Values

The *FontArray* structure uses the same formatting as the OpenInsight FONT property. Visit the [Font](#) common OLE property page for further documentation.


Default: Tahoma, 8 pt.

Indices

Index	Description
key	An item's unique key

Remarks

The ItemFont property gets and sets the font used to render the item's data. See the [Font](#) documentation for more details on its multivalued structure.

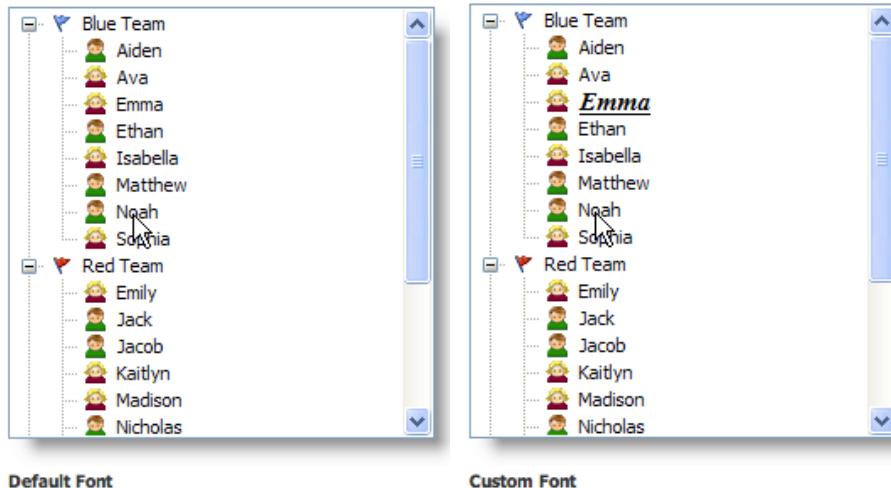

Use the [DefFont](#) property to set the default font for new items.

Example

```
// Bold the font of the item whose key is "Item1"
Set_Property(@Window:".OLE_TREE", "OLE.ItemFont[Item1]", @SVM:@SVM:700)

// Change all items font to Arial
Set_Property(@Window:".OLE_TREE", "OLE.ItemFont[All]", "Arial")
```

See Also

[Item](#), [DefFont](#)